



New features for IT Racks



BETTER AIR CIRCULATION INSIDE THE RACK

Racks now include vented doors with 86% perforation. This perforation is available also for vertically divided doors.



ADVANCED DOOR DESIGN

Doors have more perforated surfaces thanks to a better hinge and handle design and a modernized overall appearance.




LOAD RATING INCREASED TO 1500 KG




IP55 DUST AND WATER PROTECTION

Doors and side panels are fitted with polyurethane gaskets.

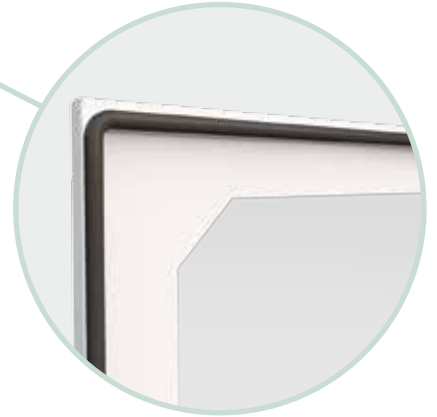

TOOL-LESS DOOR ASSEMBLY/ DISASSEMBLY

New hinges with "Safety Lift-off" allow for faster and easier door removal while protecting safety devices installed in the rack. Door can be removed only when opened at a 90-degree angle and the hinge's inner axle is pulled; no tools required.

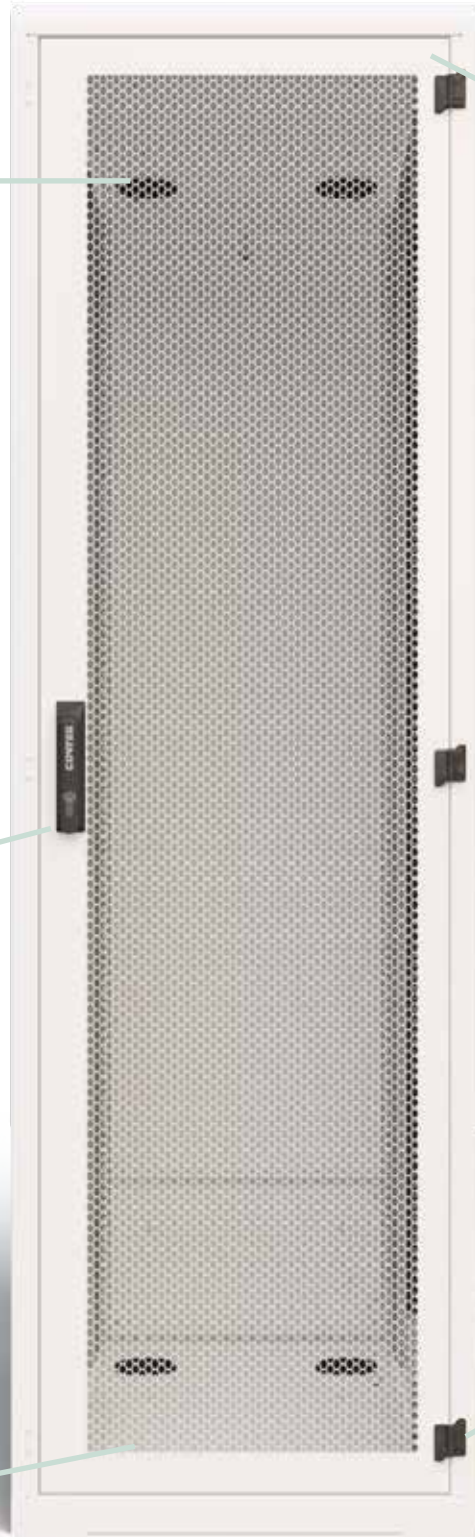

PREMIUM RACK SERIES

- Wide range of options
- Individual solutions according to your requirements
- Ideal solution for data centers and server rooms



PREMIUM RACK SERIES

	RHF	RDF	RSF	RSB
	Welded-frame 2.5 mm sheet steel	Welded-frame 1.5 and 2.5 mm sheet steel	Welded-frame 1.5 and 2.5 mm sheet steel	Welded-frame 1.5 and 2.5 mm sheet steel
Balanced load rating				
Up to 300 kg	+++	+++	+++	+++
Up to 500 kg	+++	+++	+++	+++
Up to 1000 kg	+++		+++	+++
Up to 1500 kg	+++		+++	+++
Capacity: up to 19" extrusions - 1500 kg	+++		+++	+++
IP rating				
IP20	+++	+++	+++	+++
IP40	+++	+++	+++	
IP55	+++	+++	+++	
Appropriate use				
Server rack	+++		+++	+++
Data rack	+++	+++	+++	
Cable rack	+	+++	++	
Data centers	+++	+++	+++	+++
Baying				
Side	+++	+++	+++	+++
With special sections	+++	+++	+++	
Targeted cooling				
Ventilation units	+++	+++	+++	
Top-mount CoolSpot	+++	+++	+++	
Wall-mount CoolSpot	+++	+++	+++	
Side-mount CoolTeg	+++	+++	+++	+++
Cabling				
Internal organization setup	++	+++	+++	++
Supports HDWM for cat.6A and higher	+++	+++	+++	++
Supports OptiWay	+++	+++	+++	+++
Supports TopDucts	+++	+++	+++	+++
Size				
27U		+++	+++	
42U	+++	+++	+++	+++
45U		+++	+++	+++
48U		+++	+++	+++
Colors				
Black RAL 9005	+++	+++	+++	+++
Light grey RAL 7035	+++	+++	+++	+++
Doors perforation	+++	+++	+++	+++
Locking system				
Singlepoint	+++	+++	+++	+++
Multipoint	+++	+++	+++	+++
Security options				
Access control system	+++	+++	+++	+++
Airflow management	+++	+++	+++	+++
Monitoring indoor and outdoor environment	+++	+++	+++	+++

Optimal 19" rack for your ICT applications, data centers

OPTIMAL RACK SERIES

- Racks range from 15U to 48U
- Numerous options - 10 types of doors and 12 types of door locks



OPTIMAL RACK SERIES	
ROF	RMF
Welded-frame	Demountable frame
Assembled	Unassembled
1.5 and 2.5 mm sheet steel	1.5 and 2.5 mm sheet steel

Balanced load rating		
Up to 400 kg	+++	+++
Up to 500 kg	+++	+++
Up to 800 kg	+++	
Up to 1100 kg	+++	
IP rating		
IP20	+++	+++
IP30	+++	+++
IP55	+++	
Appropriate use		
Server rack	++	++
Data rack	+++	+++
Cable rack	+++	+++
Data centers	+++	+
Baying		
Side	+++	+++
With special sections	+++	+++
Targeted cooling		
Ventilation units	+++	+++
Top-mount CoolSpot		
Wall-mount CoolSpot	+++	
Side-mount coolteg	+++	+++
Cablings		
Internal organization setup	+++	+++
Supports HDWM for cat.6A and higher	+++	+++
Supports OptiWay	++	++
Supports TopDucts	++	++
Size		
15U, 18U	+++	
21U	+++	+++
24U, 27U	+++	
33U	+++	+++
36U	+++	
42U	+++	+++
45U	+++	+++
48U	+++	
Colors		
Black RAL 9005	+++	+++
Light grey RAL 7035	+++	+++
Doors perforation	+++	+++
Locking system		
Singlepoint	+++	+++
Multipoint	+++	+++
Security options		
Access control system	+++	+++
Airflow management	+++	+++
Monitoring indoor and outdoor environment	+++	+++

or server rooms!

iSEVEN RACK SERIES

- Unbeatable ratio for money, value and quality
- Universal rack
- Ideal for basic and SOHO applications



iSEVEN RACK SERIES

Ri7	FlexRi7
Welded-frame	Demountable frame
Assembled	Unassembled
1.5 mm sheet steel	1.5 mm sheet steel

Balanced load rating		
Up to 300 kg	+++	+++
Up to 500 kg	+++	+++
Up to 1000 kg	+++	+++
IP rating		
IP30	+++	+++
Appropriate use		
Server rack	++	
Data rack	+++	+++
Cable rack	++	++
Data centers	+	
Baying		
Side	+	+
Targeted cooling		
Ventilation units	+++	+++
Side-mount coolteg	+	+
Cabling		
Internal organization setup	++	++
Supports HDWM for cat.6A and higher	++	++
Supports OptiWay	++	++
Supports TopDucts	++	++
Size		
21U	+++	+++
27U	+++	+++
42U	+++	+++
45U	+++	+++
Colors		
Black RAL 9005	+++	+++
Light grey RAL 7035	+++	+++
Locking system		
Singlepoint	+++	+++
Security options		
Access control system	++	++
Airflow management	++	++
Monitoring indoor and outdoor environment	+++	+++



CONTEG, spol. s r.o.**Headquarters**

Na Vítězné pláni 1719/4

140 00 Prague 4

Czech Republic

Tel.: +420 261 219 182

Fax: +420 261 219 192

Production plant

K Silu 2179

393 01 Pelhřimov

Czech Republic

Tel.: +420 565 300 300

Fax: +420 565 533 955

conteg@conteg.com

www.conteg.com

Local Branches/Offices:

Austria: +43 170 659 0115

Benelux: +32 477 957 126

Eastern Europe / Nordics: +49 172 848 4346

France / Italy / Maghreb: +33 686 074 386

Germany / Switzerland: +420 724 723 184

India: +91 991 695 0773

Middle East: +971 4445 2838

Russia / CIS: +7 495 967 3840

Saudi Arabia: +966 594 301 308

Ukraine: +380 674 478 240

Although this catalog was prepared, produced and checked with the best care, Conteg, spol. s r.o. cannot accept any liability for omissions or errors in this publication. Due to the continuous development and progress, Conteg, spol. s r.o. also reserves the right to change details and technical specifications of the products shown in this catalogue. Such changes along with eventual errors or printing errata shall not constitute grounds for compensation.